

VCM-14H

14-Inch Diagonal Color Video Monitor With Audio



■ Description

The VCM-14H, 14-inch color monitor is perfect for all your general-purpose color requirements. The color monitor offers more than 350 TV line horizontal resolution with superior color reproduction.

The VCM-14H makes available loop-through VIDEO-IN and VIDEO-OUT BNC-type connections with a 75-ohm termination switch. An RCA-type AUDIO-IN is provided with a built-in 2 3/4" speaker.

All controls are front mounted and concealed under a door. These controls are for TINT, COLOR, BRIGHTNESS, CONTRAST and VOLUME. Also provided is a front mounted power switch is a mechanical-type which will allow the monitor to automatically return to an "on" condition when power is restored after a power outage.

The RMK-14H optional Rack Mount Kit is available for single unit rack mounting.

The VCM-14H 14" color monitor is U.L. listed for both U.S.A. and Canada with F.C.C. approval.

■ Features

- NTSC/PAL Compatible
- 14" square CRT (13.6" actual viewing area)
- Horizontal resolution of over 350 TV lines
- BNC connector for VIDEO-IN/OUT (Loop-through)
- 75 ohm termination switch
- Audio input (RCA) with 2 3/4" speaker
- Utilizes concealed front mounted controls
- Full one-year warranty on all components
- Superior color reproduction
- Low-cost high performance
- U.L. listed and F.C.C. approved
- Optional RMK-14H Rack Mount Kit
- World Wide Power Input 90VAC-260VAC


VCM-14H

14.7-Inch Diagonal Color Video Monitor With Audio

Specifications

Horizontal Resolution	More than 350 Lines at Center	Front Controls	Volume (Rotary Knob) Power (Switch w/LED Indicator)
Input Signal	NTSC/PAL 1.0Vp-p, 75 Ohm	CRT Screen Size	14" Diagonal
Input Impedance	75 Ohms/or High (loop-through)	Visible Screen Size	13.6" Diagonal
Power Requirements	AC 90V~120V +/- 10%, 60 Hz/50Hz +/- 1%	Cabinet Finish & Materials	Black Plastic
Power Consumption	56W (AC 120V)	Dimensions	14.7W x 14H x 14.6D (Inches) (373W x 351H x 371D) (mm)
Input Connector	Video (BNC), Audio (RCA) AC Power Cord 2 Wire Plug	Weight	23 lbs.
Output Connector	Video (BNC)	Ambient Temperature	0°C - +40°C (32°F - 104°F)
Front Controls	Tint (Rotary Knob, only NTSC) Color (Rotary Knob) Brightness (Rotary Knob) Contrast (Rotary Knob)	Options	RMK-14H Rack Mount Kit

Dimensions/Location of Controls

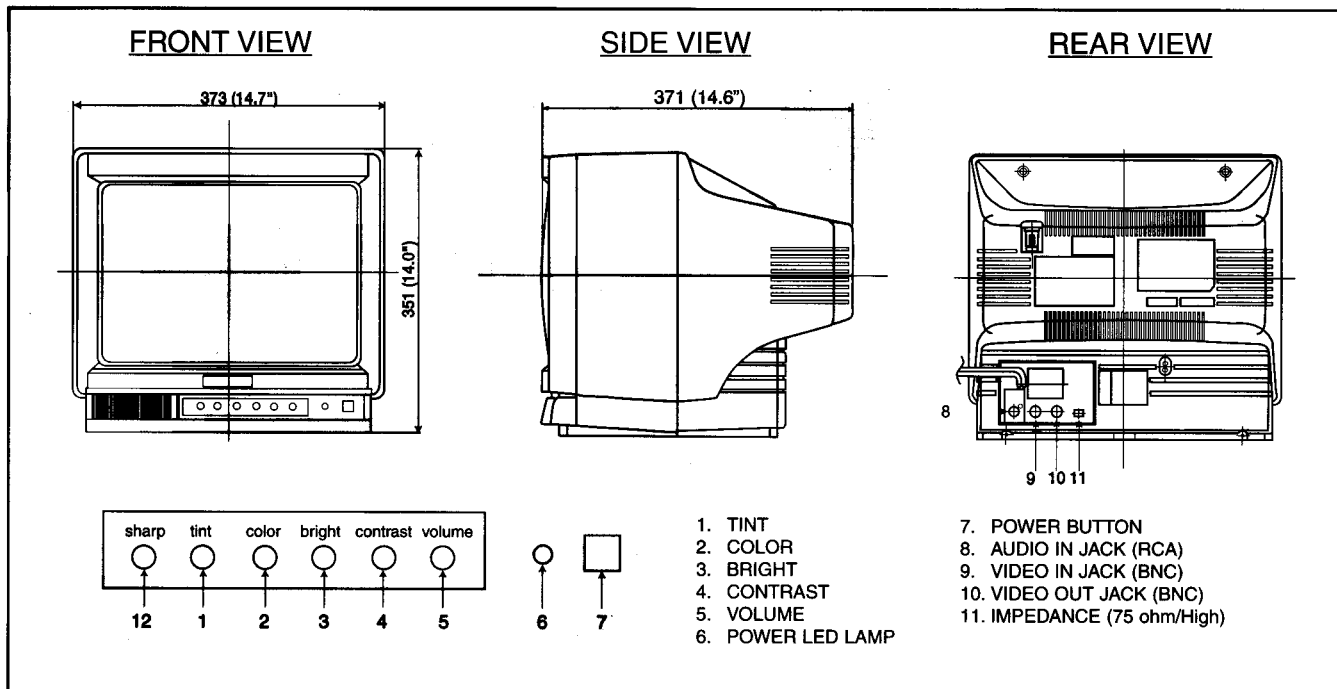

Design and specifications are subject to change without prior notice

Ikegami IKEGAMI ELECTRONICS (U.S.A.), INC

HEADQUARTERS 37 BROOK AVENUE, MAYWOOD, NJ 07607
Phone: (201) 368-9171 Fax: (201) 569-1626

NORTHEAST OFFICE 29 BROOK AVENUE, MAYWOOD, NJ 07607 Phone: (201) 368-9171 Fax: (201) 569-1626

WEST COAST OFFICE 20603 EARL STREET, TORRANCE, CA 90503 Phone: (310) 370-2400 Fax: (310) 329-9582

SOUTHWEST OFFICE THREE DALLAS COMMUNICATIONS COMPLEX, 6309 NORTH O'CONNOR ROAD, SUITE 117
IRVING, TX 75039-3510 Phone: (972) 869-2363 Fax: (972) 556-1057

MIDWEST OFFICE 747 CHURCH ROAD, UNIT C4, ELMHURST, IL 60126 Phone: (630) 834-9774 Fax: (630) 834-8689