

**Covert Camera In Working Office Clock.**

**Monochrome models offering good response to Infra-red illumination.**

**Blends with office furnishings.**



Sensor	Interline CCD
Exposure Control	Electronic
Voltage	12V DC
AGC	Always on
Video Signal	Composite into 75Ω
Operating Temp.	-10 °C to +50 °C
Relative Humidity	85% Max. non-condensing
Unit Mass	900 grammes

**Connections**


The camera is fitted with a three way lead for connection to video and power cables.

- RED – 12V DC power
- BLUE – 0V / Signal Ground (& Co-axial screen)
- YELLOW – Video signal (Co-axial core)

Suitable screened cable should be used to achieve optimum video performance. The camera requires as regulated 12V DC power supply.

The Video signal uses the 0V connection as Ground.

Mode	Sensor	Resolution	Sensitivity	Power	ORDER CODE
Monochrome	1/3" CCIR	380 TVL	0.2 Lux	100 mA	<b>COV-CLOCK-M</b>
Colour	1/3" PAL	330 TVL	0.8 Lux	60 mA	<b>COV-CLOCK-C</b>

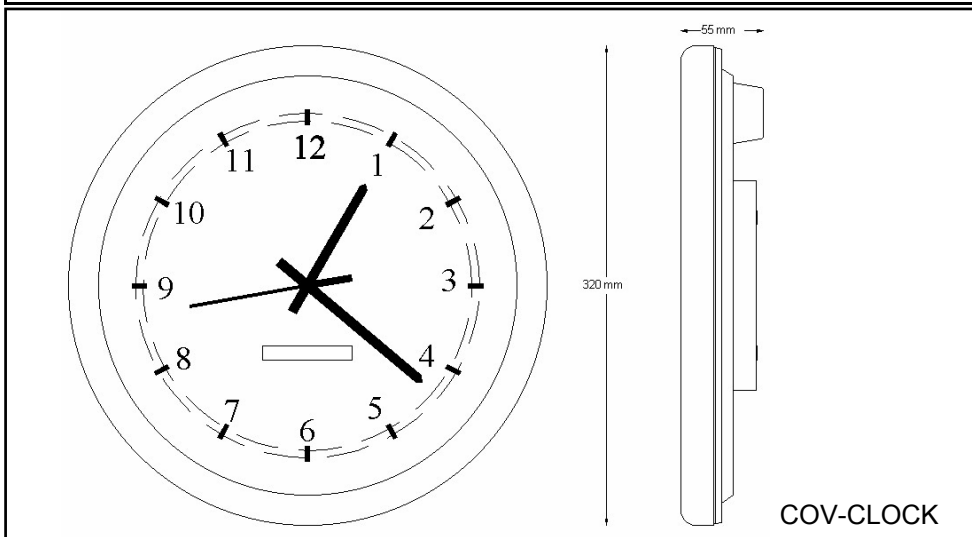

**Lenses**

Pinhole lens fitted is a 3.7 mm type.

**Please note:** Audio function is not available on the COV-CLOCK.

The time keeping mechanism operates from a single AA battery, (not included).

