


PWR-24AC-8-7

8 Camera 24VAC 7.25Amp Power Supply

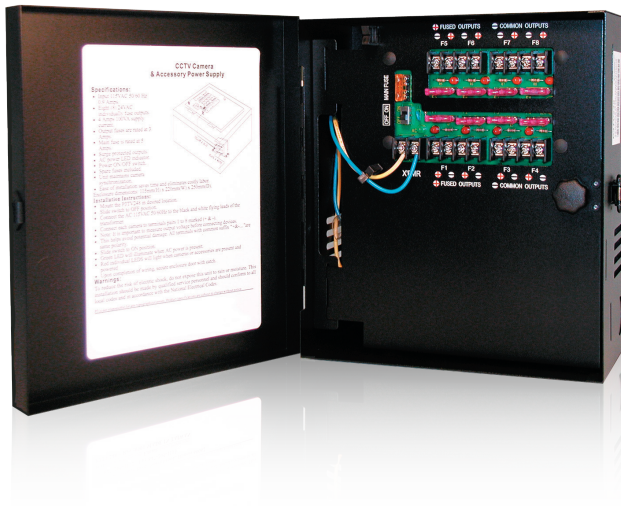

The PWR-24AC-8-7 is a CCTV power center engineered to manage remote camera and accessory power requirements. The PWR-24AC-8-7 distribution module is designed with 8 individually fused outputs for powering up to 8 CCTV cameras and accessories. It will provide 24 Volts AC via distribution to eight fused outputs with a total of 7.25 Amps continuous supply current. The PWR-24AC-8-7 power center is housed in a premium lockable heavy gauge metal enclosure.

Key Features

- Convenient screw and terminal and fuse access
- AC power LED indicator
- Includes transformer and spare fuses
- Multiple knockouts to accommodate various wiring configurations
- Uses easy to find automotive style fuses

Technical Specifications

PWR-24AC-8-7

FEATURES

- Convenient screw and terminal and fuse access
- AC power LED indicator
- Power ON/OFF switch
- Individual LED's for each fused output
- Separation panel between transformers and output access
- Double coated polyurethane finish
- Multiple knockouts to accommodate various wiring configurations
- Uses easy to find automotive style fuses
- Includes transformer and spare fuses
- Lockable heavy gauge metal enclosure

SPECIFICATIONS

Input	115VAC 50/60 HZ; 1.75 Amps
Output	3 Amps
7.25 Amps 175 VA supply current at 70°F	
Fuse	10 Amps
Eight 24VAC individually fused outputs	
Unit maintains camera synchronization	
Transformer	110/24VAC, 175VA
Enclosure Dimensions	254 x 228.6 x 114.3mm (10" x 9" x 4.5")

Dimensions

Unit : mm (inch)

